



Cable ID: Cable NEOLAN U/UTP outdoor PE 4x2x0,5 cat 5e CU



Test Summary: PASS

Test Limit: TIA Cat 5e Perm. Link
Limits Version: V7.10
Date / Time: 05/16/2026 10:15:06 PM
Operator: CHENGXIAOLAN
Headroom 8.3 dB (NEXT 1,2-3,6)
Cable Type: Cat 5e U/UTP
NVP: 69.0%

Main: Versiv
S/N: 2035009
Software Version: V6.12 Build 2
Calibration Date: 05/15/2025
Adapter: DSX-8000 (DSX-PLA804)
S/N: 20485133



Remote: Versiv
S/N: 2034142
Software Version: V6.12 Build 2
Calibration Date: 05/15/2025
Adapter: DSX-8000R (DSX-PLA804)
S/N: 20475125

Length (ft), Limit 295	[Pair 7,8]	309
Prop. Delay (ns), Limit 498	[Pair 4,5]	472
Delay Skew (ns), Limit 44	[Pair 4,5]	16
Resistance (ohms)	[Pair 3,6]	19.37
Insertion Loss Margin (dB)	[Pair 4,5]	1.3
Frequency (MHz)	[Pair 4,5]	100.0
Limit (dB)	[Pair 4,5]	21.0

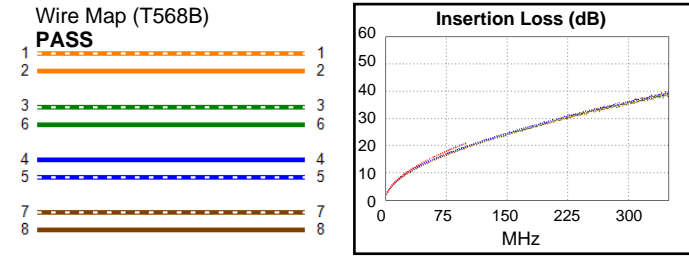



Worst Case Margin Worst Case Value



PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-7,8	1,2-3,6	3,6-7,8	1,2-3,6
NEXT (dB)	9.8	8.3	9.8	8.3
Freq. (MHz)	77.0	97.3	77.0	97.3
Limit (dB)	34.2	32.5	34.2	32.5
Worst Pair	3,6	1,2	3,6	3,6
PS NEXT (dB)	10.8	10.1	12.3	10.2
Freq. (MHz)	41.5	51.3	86.8	97.3
Limit (dB)	35.5	34.1	30.3	29.5

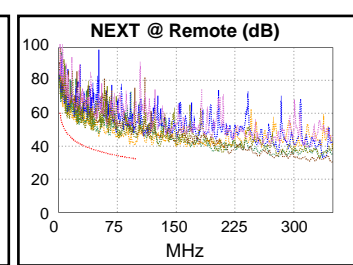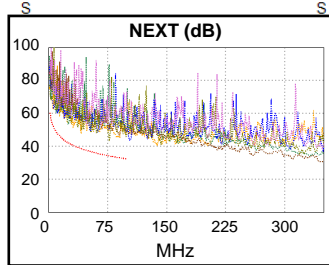



PASS	MAIN	SR	MAIN	SR
Worst Pair	1,2-7,8	7,8-1,2	7,8-1,2	1,2-7,8
ACR-F (dB)	9.2	9.1	9.6	9.7
Freq. (MHz)	66.5	66.5	91.8	91.5
Limit (dB)	22.2	22.2	19.4	19.4
Worst Pair	1,2	1,2	1,2	1,2
PS ACR-F (dB)	11.2	10.5	11.9	12.3
Freq. (MHz)	66.5	67.0	91.8	90.3
Limit (dB)	19.2	19.1	16.4	16.5

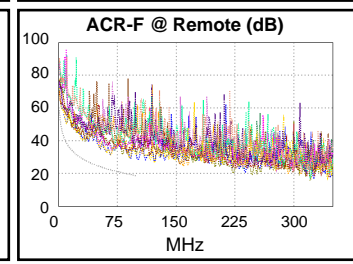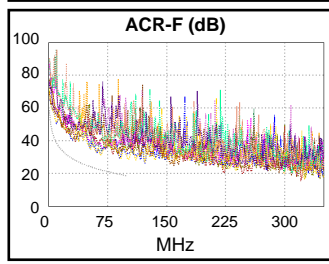

N/A	MAIN	SR	MAIN	SR
Worst Pair	1,2-3,6	1,2-3,6	3,6-7,8	1,2-3,6
ACR-N (dB)	10.6	9.8	15.4	9.9
Freq. (MHz)	41.3	97.0	98.5	97.3
Limit (dB)	25.6	11.9	11.6	11.8
Worst Pair	3,6	1,2	3,6	3,6
PS ACR-N (dB)	11.5	11.1	15.3	12.0
Freq. (MHz)	41.5	51.3	98.3	99.5
Limit (dB)	22.5	19.5	8.7	8.4

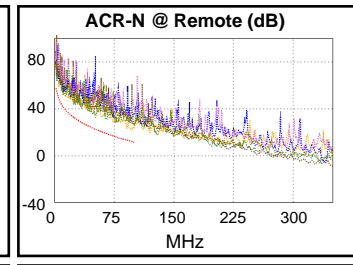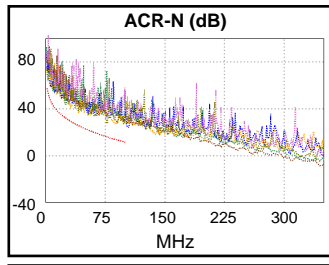

PASS	MAIN	SR	MAIN	SR
Worst Pair	7,8	1,2	7,8	1,2
RL (dB)	3.1	4.9	3.1	11.0
Freq. (MHz)	2.6	2.6	2.6	85.8
Limit (dB)	19.0	19.0	19.0	12.7

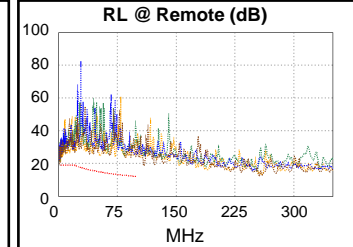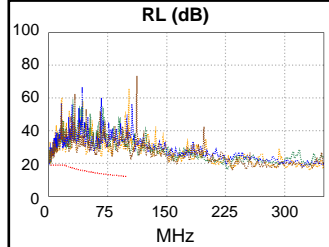

Compliant Network Standards:
 10BASE-T 100BASE-TX 100BASE-T4
 1000BASE-T 2.5GBASE-T ATM-25
 ATM-51 ATM-155 100VG-AnyLan
 TR-4 TR-16 Active TR-16 Passive